

MASTER SURFACE TECHNOLOGY SRL

Sede legale: Piazza Umberto I, 15 – 37057 San Giovanni Lupatoto (VR) - Sede operativa: Via Barsanti 7 - 37139 (VR)
 www.mastersurface.com - info@mastersurface.com - Tel.+39 (0)45 8511408 - Fax. +39 (0)45 8511438
 P.IVA IT 04252120235 – R.E.A. VR405173 - C.F e n. Iscriz. Reg.Imprese di VR 04252120235 - Capitale Sociale € 10.000

BRUSHED GRANITE

WHITE GRANITE (BIANCO SARDO)



SERIE USED:

FICKERT FIDIFLEX

GR.30

GR.40

GR.60

FICKERT DUO

GR.46

GR.60

GR.80

GR.120

GR.220/240

GR.320

FICKERT FIDIFLEX



Fickert brush with filaments of nylon loaded with diamond powder. The tool has removable lateral wings where the left one distinguishes the grits with different colors.

FICKERT DUO



Fickert brush born from the combination between TYFLEX and TAPFLEX®. The new tool uses the synergy of TYFLEX wire outside and the TAPFLEX® blades inside. The two parts per form a double work where the wire and the elastic part support the wear of a part and another reciprocally. The elastic part of the Tapflex is protected inside the tool from

the wire which allows the tool to overhang without breaking.

The tool has removable lateral wings where the left one distinguishes the grits with different colors.

ADVANTAGES:

- Reduction of the number of heads and work of two products in one.
- Color enhancement and uniformity of the surface.

SUGGESTIONS:

PRESSURE: 0,5 - 1 bar

WATER: we recommend to use a lot of water



SPEED: 50-70 cm/min

You may increase the speed if you increase the number of the heads.

MASTER SURFACE TECHNOLOGY SRL

Sede legale: Piazza Umberto I, 15 – 37057 San Giovanni Lupatoto (VR) - Sede operativa: Via Barsanti 7 - 37139 (VR)
 www.mastersurface.com - info@mastersurface.com - Tel.+39 (0)45 8511408 - Fax. +39 (0)45 8511438
 P.IVA IT 04252120235 – R.E.A. VR405173 - C.F e n. Iscriz. Reg.Imprese di VR 04252120235 - Capitale Sociale € 10.000

BRUSHED GRANITE BLACK GRANITE

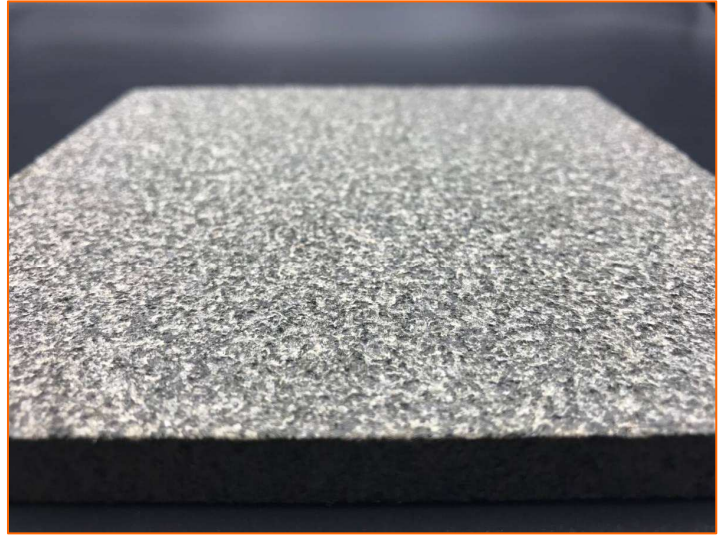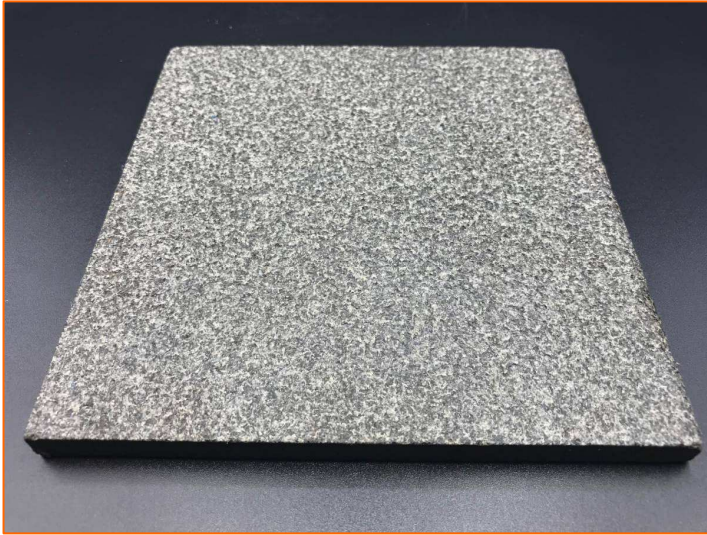

SERIE USED:

FICKERT FIDIFLEX	
GR.30	
GR.40	
GR.60	
FICKERT DUO	
GR.46	
GR.60	
GR.80	
GR.120	
GR.220/240	
GR.320	

FICKERT FIDIFLEX



Fickert brush with filaments of nylon loaded with diamond powder. The tool has removable lateral wings where the left one distinguishes the grits with different colors.

FICKERT DUO



Fickert brush born from the combination between TYFLEX and TAPFLEX®. The new tool uses the synergy of TYFLEX wire outside and the TAPFLEX® blades inside. The two parts per form a double work where the wire and the elastic part support the wear of a part and another reciprocally. The elastic part of the Tapflex is protected inside the tool from

the wire which allows the tool to overhang without breaking. The tool has removable lateral wings where the left one distinguishes the grits with different colors.

ADVANTAGES:

- Reduction of the number of heads and work of two products in one.
- Color enhancement and uniformity of the surface.

SUGGESTIONS:

PRESSURE: 0,5 - 1 bar

WATER: we recommend to use a lot of water

SPEED: 50-70 cm/min

You may increase the speed if you increase the number of the heads.

MASTER SURFACE TECHNOLOGY SRL

Sede legale: Piazza Umberto I, 15 – 37057 San Giovanni Lupatoto (VR) - Sede operativa: Via Barsanti 7 - 37139 (VR)
 www.mastersurface.com - info@mastersurface.com - Tel.+39 (0)45 8511408 - Fax. +39 (0)45 8511438
 P.IVA IT 04252120235 – R.E.A. VR405173 - C.F e n. Iscriz. Reg.Imprese di VR 04252120235 - Capitale Sociale € 10.000

BRUSHED GRANITE

WHITE GRANITE (ROSA SARDO)



SERIE USED:

FICKERT FIDIFLEX

GR.30

GR.40

GR.60

FICKERT DUO

GR.46

GR.60

GR.80

GR.120

GR.220/240

GR.320

FICKERT FIDIFLEX



Fickert brush with filaments of nylon loaded with diamond powder. The tool has removable lateral wings where the left one distinguishes the grits with different colors.

FICKERT DUO



Fickert brush born from the combination between TYFLEX and TAPFLEX®. The new tool uses the synergy of TYFLEX wire outside and the TAPFLEX® blades inside. The two parts per form a double work where the wire and the elastic part support the wear of a part and another reciprocally. The elastic part of the Tapflex is protected inside the tool from

the wire which allows the tool to overhang without breaking.

The tool has removable lateral wings where the left one distinguishes the grits with different colors.

ADVANTAGES:

-Reduction of the number of heads and work of two products in one.

-Color enhancement and uniformity of the surface.

SUGGESTIONS:

PRESSURE: 0,5 - 1 bar

WATER: we recommend to use a lot of water

SPEED: 50-70 cm/min

You may increase the speed if you increase the number of the heads.